


MASTIC SILICONE NEUTRE

MULTI-PURPOSE NEUTRAL SILICONE SEALANT AIRTIGHT JOINTS ON MOST BUILDING MATERIALS

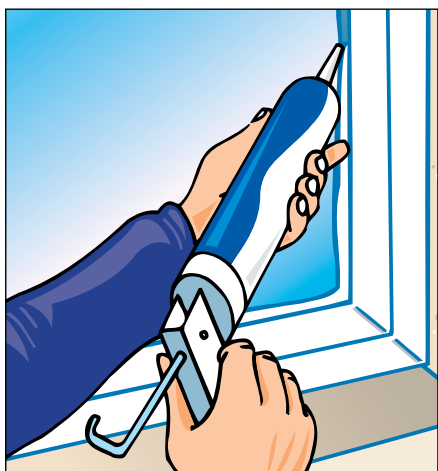

NATURE OF THE PRODUCT

One-part sealant with silicone elastomer, neutral oxime.

SNJF label F25E façade product.


FIELD OF APPLICATION

For forming all airtight and expansion, wet glazing, joinery or PVC joints, indoors and outdoors.

Excellent stability in the presence of UV and high temperatures.

ADVANTAGES

- Excellent stability in the presence of UV rays and high temperatures.



APPLICATION

SURFACE PREPARATION BEFORE APPLICATION

Surfaces must be clean, dry, in good condition, and oil and dust-free.

FORMING JOINT

Compress one undamaged end of the joint and masking tape for a better finish.

Apply one layer of sealant to single width joints, and three layers to double width joints - the first two on the lips of the joint, and the third on the bottom.

Wash with soapy water, conveniently fix the sealant against the lips and bottom of the joint, preventing any air bubbles.

Remove masking tape.

Wash material with white spirit before drying.

Any polymerised sealant can be scraped off.

TECHNICAL CHARACTERISTICS

- Skin forming time: about 15 minutes (23°C, 50 % HR).
- Polymerised thickness: inn 24 h (23° C, 50 % HR) 2.5 mm.
- Maximum elongation acc. to ISO 8339: 250 %.
- Water vapor transmission rate acc. to NFT 30018: 32 g/m²/24 h.
- Application temperature: +5° C to + 40° C.
- UV resistance: excellent.

QUANTITY

Length of possible joint with a 310 ml cartridge (in metres).

JOINT THICKNESS	WIDTH			
	4 mm	6 mm	8 mm	20 mm
4 mm	19 m	13 m	9,7 m	6,5 m
6 mm	-	8,6 m	6,5 m	4,3 m
8 mm	-	-	4,8 m	3,2 m
10 mm	-	-	-	2,6 m

The length of the joint is generally double the thickness.

PRECAUTIONS DURING USE

Avoid contact with the skin. If the product comes into contact with the eyes, wash immediately with plenty of water and seek medical advice. Keep out of the reach and sight of children.

COLOURS

White & colourless.

STORAGE

12 months away from the cold and high temperatures, in original unopened packaging.

