

PRODUCT DESCRIPTION & TECHNICAL SPECIFICATIONS

Strengthening of plasterboard angles.

Trade name	Product name	12.5m reinforced tape
Product dimensions	Height (in mm)	50
	Width (in mm)	170
	Length (in mm)	170
	Weight (in kg)	0.15
Material	Paper & steel	
Characteristics	Steel thickness :	0.28 mm +/- 0.02 mm
	Quality :	DC01 + C690 + ZE 20/20-A-S according to EN 10152
	Width	11 mm
Composition	100% long fibre softwood paper Source :	USA
	Paper density	138.5 gr/m ²
Consumption	Average consumption (per m ²)	1,4
	Average consumption (per m)	1
Install information : all products	Unit pack : type	box
	Unit pack : height (in cm)	5,5
	Unit pack : width (in cm)	17,5
	Unit pack : weight (in kg)	1,5
	Unit pack : depth (in cm)	17,7
	Number of products / parcels (in items)	10

ADVANTAGES

- Classic and fast install
- Invisible after finishing
- Strong resistance

REFERENCES TO TECHNICAL DOCUMENTS

- Customs nomenclature : 72122000
- Regulations : NF EN 14353 compliant with DTU 25.41

REFERENCES & PACKAGINGS

- Product reference : A03074
- Barcode : 3585501030741
- Packaging : 20 rolls per carton
40 cartons per pallet.

AREA OF APPLICATION

Strengthening of plasterboard angles.

INSTRUCTIONS FOR USE

1. Apply the reinforced tape to the angle previously coated with plaster jointing compound
2. Fold and secure the tape to form the angle
3. Cover the tape with plaster jointing compound




1.

2.

3.

DO YOU KNOW THE ASSOCIATED SEMIN PRODUCTS ?

- CE 78 : apply like a rendering coat.

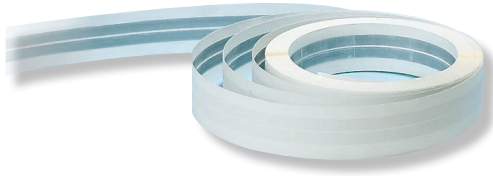

PRODUCT DESCRIPTION & TECHNICAL SPECIFICATIONS

Strengthening of plasterboard angles.

Trade name	Product name	30m reinforced tape
Product dimensions	Height (in mm)	50
	Width (mm)	190
	Length (in mm)	190
	Weight (in kg)	1,86
Material		Paper & Steel
Characteristics	Steel thickness :	0.28 mm +/- 0.02 mm
	Quality : DC01 + C690 + ZE 20/20-A-S according to EN 10152	
	Width :	11 mm
Composition	100% long fibre softwood paper Source: USA. density 138.5 gr/m ²	Paper
Consumption	Average consumption (per m ²)	1,4
	Average consumption (per m)	1
Info for display : all products	Unit pack : type	box
	Unit pack : height (in cm)	5,5
	Unit pack : width (in cm)	21
	Unit pack : weight (in kg)	1,95
	Unit pack : depth (in cm)	21
	Number of products/parcels (in items)	10

ADVANTAGES

- Classic and fast install
- Invisible after finishing
- Strong resistance

REFERENCES TO TECHNICAL DOCUMENTS

- Customs nomenclature: 72122000
- Regulations : NF EN 14353 compliant with DTU 25.41

REFERENCES & PACKAGINGS

- Product reference : A00246
- Barcode: 3585501002 65
- Packaging: 45 cartons of 10 rolls
45 cartons per pallet.

AREA OF APPLICATION

Strengthening of plasterboard angles.

INSTRUCTIONS FOR USE

1. Apply the reinforced tape to the angle previously coated with plaster jointing compound
2. Fold and secure the tape to form the angle
3. Cover the tape with plaster jointing compound



1.

2.

3.

DO YOU KNOW THE ASSOCIATED SEMIN PRODUCTS ?

- CE 78 : Apply like a rendering coat.

30M REINFORCED TAPE